

PHILIPS
dynamite 
Networked Solutions

Philips Dynamite Product Portfolio





German Centre
Shanghai, China

Philips Dynalite – the intelligent choice

When you choose Philips Dynalite, you are selecting the world’s finest lighting control system. Tried and tested in more than 30,000 projects, Philips Dynalite has implemented some of the largest and most extensive control networks around the globe. The same robust technology can be applied to any application, on any scale.

Philips Dynalite is part of the Signify Professional Systems group. This global group includes several other worldwide leaders in LED lighting and advanced lighting controls including Philips Color Kinetics, Philips CityTouch, and Philips Large Luminous Surfaces.

Combined, these groups offer years of market knowledge and experience in developing best-in-class lighting solutions and controls. Signify builds on our extraordinary strengths and depth of expertise to bring the best-in-the-industry connected lighting systems to our valued customers and partners.

Our experience and expertise are unrivaled and our reputation is based on delivering successful outcomes for difficult and challenging projects. So, it is not really a matter of “Why use Philips Dynalite?” but “Why use anything else?”

This Product Portfolio provides a general overview of the Philips Dynalite range of Indoor Networked Controls products and solutions. Further detailed information can be found on each product in their specific Technical Datasheet, available for download at: www.philips.com/dynalite

PHILIPS

dynalite 

Contents

User Interfaces

PAXBPA	AntumbraButton American	7
PAXBPE	AntumbraButton European	7
PADPA	AntumbraDisplay American	8
PADPE	AntumbraDisplay European	8
PATPA	AntumbraTouch American	9
PATPE	AntumbraTouch European	9
PDRxA	Revolution Series American	10
PDRxE	Revolution Series European	10
DACM-DyNet	DyNet Application Communication Module	11
PAXBLE	AntumbraLite European	11
PDTS	Networked Touchscreen	12

Sensors

DUS360CR	Multifunction Sensor	14
DUS360CR-DA	Multifunction Sensor	14
DUS360CR-D	Multifunction Sensor	15
DUS360CS	Multifunction Sensor	15
DUS360CS-D	Multifunction Sensor	16
DUS804CS-UP	Multifunction Sensor	16
DUS90CS	Multifunction Sensor	17
DUS30CS	Multifunction Sensor	17
DUS90AHB-D	Multifunction Sensor	18
DUS90WHB-D	Multifunction Sensor	18
DUS30LHB-D	Multifunction Sensor	19

Relay Controllers

DDRC-GRMS-E	Multi-Protocol Switching Room Controller	21
DDRC420FR	Relay Controller	21
DDRC810DT-GL	Relay Controller	22
DDRC1220FR-GL	Relay Controller	22
DMRC210	Relay Controller	23

Power Dimmers

DDLEDC605GL	PWM Controller	26
-------------	----------------	----

Signal Dimmers

DDBC120-DALI	DALI-2 Driver Controller	28
DDBC320-DALI	DALI-2 Driver Controller	28
DDBC516FR	Signal Dimmer Controller	29
DDBC1200	Signal Dimmer Controller	29
DBC905	Signal Dimmer Controller	30
DMBC110	Signal Dimmer Controller	30

Multipurpose Controllers

DDMC802	Multipurpose Modular Controller	32
DMC2	Multipurpose Modular Controller	33
DMC4	Multipurpose Modular Controller	33
Control Modules	DMC Multipurpose Controllers	34

Integration Devices

DDNG232	RS-232 Gateway	36
DDNG-KNX	KNX Gateway	36
DLLI8I80	Dry Contact Interface	37
DPMI940-D	Dry Contact Interface	37
DDMIDC8	Low Level Input Integrator	38
DDFCUC	Fan Coil Unit Controller	38

Network Devices

PDDEG-S	Ethernet Gateway - Supervisor	40
PDEG	Ethernet Gateway	40
PDEB	Ethernet Bridge	41
DDNG485	RS-485 Gateway	41
DDTC001	Timeclock	42
DTK622-USB	PC Node	42
DTK622-232	Serial Port Node	43

Electrical Accessories

PAEFE	Antumbra Electrical Frames	45
DDNP1501	Network Power Supply	45
DMAL120F	Active Load	46
DyNet-STP-CABLE-LSZH	Cat 5e Cable	46
DyNet-SFLAT6-CABLE	Flat Cable	47
DH2X24	DIN Rail Enclosure	47
DINGUS	Serial Port Connectors	48

Wired Systems

PDRAS	Multizone Control System	50
PDUVCC	UV-C control system	51
PD-KoD	DALI Demo Case	52
PD-KoD-TC	DALI Mini Training Case	52

Software and Apps

Philips Dynalite System Manager	54
Philips Dynalite System Builder	54
Philips Dynalite Control App	55
Philips Dynalite EnvisionTouch	55
Philips Dynalite DynamicTouch	56

Further Reading

User Interfaces



Dorsett Hotel
Gold Coast, Australia

PAxBPA AntumbraButton American

Contemporary two, four, or six-button panel with light-wash effect

The Philips AntumbraButton user interface features a sleek, contemporary design and incorporates the latest in field effect technology. Each easy-to-press mechanical button can be customized with text or icons and programmed to perform a wide variety of local and site-wide control functions. The PA2BPA, PA4BPA, and PA6BPA range is suitable for, but not limited to North American, South American, Australian and New Zealand markets.

Field effect technology – The user interface detects an approaching user and ‘wakes up’, initiating a wall-wash lighting effect to encourage interaction.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains logical and network functions and can be pre-programmed off-site, allowing commissioning to commence prior to finalizing rim and button options.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly.

A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Décor-matching options – Rims are available in aluminum, chrome, magnesium and white. Corona polycarbonate button finishes include Magnesium, Silver and White. Flare metallic button finishes include Aluminum, Gold, Jet, Noir, Prestige and Vintage.



Dimensions:
116 x 75 x 36 mm (4.57 x 2.95 x 1.42 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PAxBPE AntumbraButton European

Contemporary two, four, or six-button panel with light-wash effect

The Philips AntumbraButton user interface features a sleek, contemporary design and incorporates the latest in field effect technology. Each easy-to-press mechanical button can be customized with text or icons and programmed to perform a wide variety of local and site-wide control functions. The PA2BPE, PA4BPE, and PA6BPE range is suitable for, but not limited to, European, Middle Eastern, African and Asian markets.

Field effect technology – The user interface detects an approaching user and ‘wakes up’, initiating a wall-wash lighting effect to encourage interaction.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains logical and network functions and can be pre-programmed off-site, allowing commissioning to commence prior to finalizing rim and button options.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly.

A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Décor-matching options – Rims are available in aluminum, chrome, magnesium and white. Corona polycarbonate button finishes include Magnesium, Silver and White. Flare metallic button finishes include Aluminum, Gold, Jet, Noir, Prestige and Vintage.



Dimensions:
88 x 88 x 23 mm (3.46 x 3.46 x 0.90 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PADPA AntumbraDisplay American

Contemporary button panel with LCD display

The Philips AntumbraDisplay user interface provides a central LCD display to present multiple pages of functions and system information. It incorporates the latest in field effect technology. The contemporary design features a number of button configurations, with each button capable of local or site-wide control functions. The PADPA range is suitable for, but not limited to, North American, South American, Australian and New Zealand markets.

Field effect technology – The user interface detects an approaching user and ‘wakes up’, initiating a wall-wash lighting effect to encourage interaction.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains all of the logical and network functions and is pre-programmed off-site, allowing commissioning to commence prior to finish options being finalized.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly. A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple languages and icons – Display language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Central LCD – Allows for display of system information including temperature, time, channel level and current scene. Button function can change when navigating between up to 16 pages.

Décor-matching options – Rims are available in aluminum, chrome, magnesium and white. Corona polycarbonate button finishes include Magnesium, Silver and White. Flare metallic button finishes include Aluminum, Gold, Jet, Noir, Prestige and Vintage.



Dimensions:
116 x 75 x 36 mm (4.57 x 2.95 x 1.42 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PADPE AntumbraDisplay European

Contemporary button panel with LCD display

The Philips AntumbraDisplay user interface provides a central LCD display to present multiple pages of functions and system information. It incorporates the latest in field effect technology. The contemporary design features a number of button configurations, with each button capable of local or site-wide control functions. The PADPE range is suitable for, but not limited to, European, Middle Eastern, African and Asian markets.

Field effect technology – The user interface detects an approaching user and ‘wakes up’, initiating a wall-wash lighting effect to encourage interaction.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains all of the logical and network functions and is pre-programmed off-site, allowing commissioning to commence prior to finish options being finalized.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly. A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple languages and icons – Display language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Central LCD – Allows for system information to be shown such as temperature, time, channel level and current scene. Button function can change when navigating between the up to 16 pages.

Décor-matching options – Rims are available in aluminum, chrome, magnesium and white. Corona polycarbonate button finishes include Magnesium, Silver and White. Flare metallic button finishes include Aluminum, Gold, Jet, Noir, Prestige and Vintage.



Dimensions:
88 x 88 x 36 mm (3.46 x 3.46 x 1.42 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PATPA AntumbraTouch American

Contemporary smooth glass panels with capacitive touch technology

The Philips AntumbraTouch user interface has a smooth glass finish with capacitive touch technology to detect button presses. It also incorporates the latest in field effect technology to sense a person's presence. The contemporary design features a number of button configurations, with each button capable of local or site-wide control functions. The PATPA range is suitable for, but not limited to, North American, South American, Australian and New Zealand markets.

Field effect technology – The user interface detects an approaching user and 'wakes up', initiating a wall-wash lighting effect to encourage interaction.

Capacitive touch technology – Smooth glass finish detects the presence of a finger and triggers a button press action.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains all of the logical and network functions and is pre-programmed off-site, allowing commissioning to commence prior to finish options being finalized.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly. A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Décor-matching options – Rims are available in Aluminum, Black, Chrome and White. Fascia finishes include Black, Silver and White.



Dimensions:
116 x 75 x 22 mm (4.57 x 2.95 x 0.87 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PATPE AntumbraTouch European

Contemporary smooth glass panels with capacitive touch technology

The Philips AntumbraTouch user interface has a smooth glass finish with capacitive touch technology to detect button presses. It also incorporates the latest in field effect technology to sense a person's presence. The contemporary design features a number of button configurations, with each button capable of local or site-wide control functions. The PATPE range is suitable for, but not limited to, European, Middle Eastern, African and Asian markets.

Field effect technology – The user interface detects an approaching user and 'wakes up', initiating a wall-wash lighting effect to encourage interaction.

Capacitive touch technology – Smooth glass finish detects the presence of a finger and triggers a button press action.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains all of the logical and network functions and is pre-programmed off-site, allowing commissioning to commence prior to finish options being finalized.

Hidden sensory inputs – An internal light sensor measures ambient light and adjusts lightwash effect accordingly. A built-in temperature sensor automatically adjusts air conditioning when integrated into the system.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Décor-matching options – Rims are available in Aluminum, Black, Chrome and White. Fascia finishes include Black, Silver and White.



Dimensions:
88 x 88 x 22 mm (3.46 x 3.46 x 0.87 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.

PDRxA Revolution Series American

Contemporary two-, four-, or eight-button panel with backlit buttons

The Philips Dynalite Revolution user interface features a sleek, contemporary design and incorporates the latest in field effect technology. Each easy-to-press mechanical button can be customized with text or icons and programmed to perform a wide variety of local and site-wide control functions. The Revolution American range is suitable for, but not limited to, North American, South American, Australian and New Zealand markets.

Field effect technology – The user interface detects an approaching user and lights up to encourage interaction.

Color backlight – Customize each button's backlight from an RGB color palette.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module (DACM) contains logical and network functions and can be pre-programmed off-site, allowing commissioning to commence prior to finalizing rim and button options.

Multiple language and icon labeling

– Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Custom button engraving – Available on request.

Décor-matching options – Buttons and rims are available in a range of attractive glass-look polycarbonate finishes.



Available in Q2-2023

Dimensions:
116 x 76 x 38 mm (4.57 x 2.99 x 1.50 in)

Ordering Code:
Please contact your local Signify representative.

PDRxE Revolution Series European

Contemporary two-, four-, or eight-button panel with backlit buttons

The Philips Dynalite Revolution user interface features a sleek, contemporary design and incorporates the latest in field effect technology. Each easy-to-press mechanical button can be customized with text or icons and programmed to perform a wide variety of local and site-wide control functions. The Revolution Euro range is suitable for, but not limited to, European, Middle Eastern, African and Asian markets.

Field effect technology – The user interface detects an approaching user and lights up to encourage interaction.

Color backlight – Customize each button's backlight from an RGB color palette.

Supplied as two components – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module (DACM) contains logical and network functions and can be pre-programmed off-site, allowing commissioning to commence prior to finalizing rim and button options.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Custom button engraving – Available on request.

Décor-matching options – Buttons and rims are available in a range of attractive glass-look polycarbonate finishes.



Dimensions:
88 x 88 x 38 mm (3.46 x 3.46 x 1.50 in)

Ordering Code:
Please contact your local Signify representative.

DACM-DyNet DyNet Application Communication Module

DyNet network interface for Antumbra and Revolution user interfaces

The DACM-DyNet is a DyNet application communication module that connects Antumbra and Revolution user interfaces to the Philips Dynalite system.

Powered by DyNet – Does not require an external power supply.

64-channel DMX Tx support – Can be set up to communicate directly with DMX fixtures.

Onboard processor – Contains all logical and network functions and can be commissioned prior to installation.

Functions without application module – Can be installed, wired and tested without application module, avoiding fascia damage during ongoing construction.

Pre-configuration – Can store and recall up to 21 configurations using the DIP switch, streamlining the commissioning and installation process.

Dimensions:
45 x 43 x 25 mm (1.77 x 1.70 x 0.98 in)

Ordering Code:
12NC 913703072809



PAXBLE AntumbraLite European

Two, four, or six-button panel with dry contact switches

The AntumbraLite is a cost-effective user interface with a sleek, contemporary design, intended for use with any Dynalite load controller featuring dry contact inputs. Available in the full range of Antumbra button and rim finishes, AntumbraLite also supports customized button labelling with text or icons to suit any application.

Multiple language and icon labeling – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.

Décor-matching options – Buttons and rims are available in a range of attractive polycarbonate and metallic finishes.

Dimensions:
88 x 88 x 24.5 mm (3.46 x 3.46 x 0.96 in)

Ordering Code:
Please use the online Antumbra configurator at www.philips.com/antumbra for ordering codes.



PDTS Networked Touchscreen

Advanced building automation and control at your fingertips

Designed as an integral part of the Dynalite system, the PDTS offers intelligent control and direct access to scheduling, scene editing, diagnostics, and local environmental sensing. Combining a powerful onboard processor with contemporary design cues from the Antumbra user interface range, the PDTS is a sleek, functional complement to any project.

178 mm capacitive touchscreen – With high resolution, rich color and wide viewing angle.

Proximity sensor – Triggers soft halo light effect to welcome user interaction.

Ethernet port – Provides access for commissioning.

Internal astronomical timeclock – Enables advanced scheduling of behavior, options, and automated tasks based on time of day or sunrise/sunset.

Customizable graphical menus – Seamless control of lighting, curtains/blinds, HVAC, A/V equipment and compatible third-party systems.

Built-in environmental sensors – Humidity and temperature can be displayed on standby screen and communicated to third-party systems.

Templated commissioning option – Simply load the project XML file for fast configuration, or upload custom web pages from System Builder.

Thin profile and easy mounting – Fits industry-standard double wall boxes (EU or US).

Secure access – Employs HTTPS for secure, encrypted network communication, with support for onboard security certificates.

User authentication – Secure login feature available for CGI commands and user functions, with customizable access levels for each user.



Dimensions:
124 x 184 x 40 mm (7.24 x 4.88 x 1.57 in)

Ordering Code:

PDTS	12NC – 913703334309
------	---------------------

Accessories:

DDNP1501 (12 VDC network power supply)	12NC – 913703090309
DMNP24040-P-NA (24 VDC network power supply)	12NC – 913703580309

Sensors



DUS360CR Multifunction Sensor

Low profile recessed 360° ceiling sensor

The Philips Dynalite DUS360CR is a recess mountable 360 degree multifunction sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as offices, lecture theaters and homes.

Motion detection feature – Detects the presence or absence of motion and adjusts lights accordingly.

Segmented click-up bezel – Surrounds the motion sensor element and enables a portion of the sensing field to be masked. This prevents nuisance detection from adjacent doorways or corridors.

Ambient light level regulation – In applications where it is critical to maintain precise light levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor.

Daylight harvesting mode – Delivers automatic energy savings.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Suitable for plenum use – UL approved for installation in air-handling plenum spaces.

Dimensions:
72 dia. x 41 mm (2.83 dia. x 1.61 in)

Ordering Code:
12NC – 913703689609



DUS360CR-DA Multifunction Sensor

Low profile recessed 360° ceiling sensor

The Philips Dynalite DUS360CR-DA is a recess mountable 360 degree motion sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into the one device. Integrated DIP switches allow physical adjustment of the sensor's area addressing, no-motion time-out period, and corridor hold functionality, for commissioning-free installation and replacement.

Low profile design – Flush-mounted 360 degree ceiling-mount motion detection (PIR) sensor.

No software set-up – All functionality can be achieved with the built-in DIP switches for area addressing, no-motion time-out and other advanced features.

Rapid configuration – Up to 31 individual addressing areas of control.

User-selectable options – No-motion time-out selectable to 30 seconds, 5 minutes, 15 minutes or 30 minutes.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Suitable for plenum use – UL approved for installation in air-handling plenum spaces.

Dimensions:
72 dia. x 41 mm (2.83 dia. x 1.61 in)

Ordering Code:
12NC – 913703029309



DUS360CR-D Multifunction Sensor

Low profile recessed 360° ceiling sensor powered by the DALI network

The Philips Dynalite DUS360CR-D is a recess mountable 360 degree multifunction sensor that combines motion detection (PIR) and ambient light level detection (PE) in one device. The DUS360CR-D is powered and communicates to the networked control system via a DALI bus.

Powered directly by the DALI network – Eliminates the need for additional network field wiring.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Motion detection feature – Detection of motion within a scanned area triggers a programmed lighting action.

Segmented click-up bezel – Surrounds the motion sensor element and enables a portion of the sensing field to be masked. This prevents nuisance detection from adjacent doorways or corridors.

Daylight harvesting mode – Delivers automatic energy savings.

Ambient light level regulation – In applications where it is critical to maintain precise light, the PE function reads ambient levels and adjusts artificial light levels accordingly.

Infrared receive capability – Enables sign-on identification to the networked system.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Dimensions:
72 dia. x 41 mm (2.83 dia. x 1.61 in)

Ordering Code:
12NC – 913703213009



DUS360CS Multifunction Sensor

Surface mount 360° ceiling sensor

The Philips Dynalite DUS360CS is a surface mountable 360 degree multifunction sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as hotels, restaurants and homes.

Motion detection feature – Detects the presence or absence of motion and adjusts lights accordingly.

Segmented click-up bezel – Surrounds the motion sensor element and enables a portion of the sensing field to be masked. This prevents nuisance detection from adjacent doorways or corridors.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor.

Ambient light level regulation – In applications where it is critical to maintain precise light levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting mode – Delivers automatic energy savings.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receiver.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.



Dimensions:
105 x 46 mm (4.34 x 1.81 in)

Ordering Code:
12NC – 913703243109

DUS360CS-D Multifunction Sensor

Surface mount 360° ceiling sensor

The Philips Dynalite DUS360CS-D is a surface mountable 360 degree multifunction sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as hotels, restaurants and homes.

Powered directly by the DALI network

– Eliminates the need for additional network field wiring.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Motion detection feature – Detects the presence or absence of motion and adjusts lights accordingly.

Segmented click-up bezel – Surrounds the motion sensor element and enables a portion of the sensing field to be masked. This prevents nuisance detection from adjacent doorways or corridors.

Ambient light level regulation

– In applications where it is critical to maintain precise light levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting mode

– Delivers automatic energy savings.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receiver.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Dimensions:

105 x 46 mm (4.34 x 1.81 in)

Ordering Code:

12NC – 913703023909



DUS804CS-UP Multifunction Sensor

Surface mount ceiling sensor with ultrasonic capability

The Philips Dynalite DUS804CS-UP is a surface mountable 360 degree multifunction sensor that combines ultrasonic (UP), motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as offices, industrial buildings and secure areas of public buildings.

Motion detection feature – Detection of motion within scanned area triggers a programmed lighting action. Ultrasonic technology enables motion detection behind fixed objects.

Ambient light level regulation

– In applications where it is critical to maintain precise light levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor of the DUS804CS-UP.

Daylight harvesting mode – Delivers automatic energy savings.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Dimensions:

90 dia. x 32 mm (3.54 dia. x 1.26 in)

Ordering Code:

12NC – 913703070409



DUS90CS Multifunction Sensor

Wall/ceiling mount 90° multifunction sensor

The DUS90CS is wall or ceiling mountable multifunction sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as offices, industrial buildings and homes.

Motion detection feature – Detects the presence or absence of motion and adjusts lights accordingly.

Ambient light level regulation – In applications where it is necessary to maintain even lighting, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting mode – Delivers automatic energy savings.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor.

Multiple mounting options – The sensor has a 30° scan pattern with flexible angle adjustment and can be recessed or surface mounted on a wall or ceiling.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

IP54 rating – Dust- and splash-resistant housing allows installation in a variety of indoor and outdoor applications.

Dimensions:
98 x 90 x 153 mm (3.86 x 3.54 x 6.02 in)

Ordering Code:
12NC – 913703244209



DUS30CS Multifunction Sensor

Wall/ceiling mount 30° multifunction sensor

The DUS30CS is wall or ceiling mountable multifunction sensor that combines motion detection (PIR), infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as offices, industrial buildings and homes.

Motion detection feature – Detects the presence or absence of motion and adjusts lights accordingly.

Ambient light level regulation – In applications where it is necessary to maintain even lighting, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting mode – Delivers automatic energy savings.

Infrared receive capability – Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor.

Multiple mounting options – The sensor has a 30° scan pattern with flexible angle adjustment and can be recessed or surface mounted on a wall or ceiling.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

IP54 rating – Dust- and splash-resistant housing allows installation in a variety of indoor and outdoor applications.

Dimensions:
98 x 90 x 153 mm (3.86 x 3.54 x 6.02 in)

Ordering Code:
12NC – 913703244309



DUS90AHB-D Multifunction Sensor

Aisleway high bay DALI network sensor

The Philips Dynalite DUS90AHB-D is a 90 degree multifunction sensor that combines motion detection (PIR) and ambient light level detection (PE) in one device. The sensor uses the DALI protocol for power and communications to a network control system, eliminating the need for additional network field wiring. This sensor is ideal for mounting between warehouse shelving.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Powered directly by the DALI network – Eliminates the need for any additional network field wiring.

Motion detection feature – Detects the presence or absence of motion and triggers a programmed action.

Ambient light level detection – In applications where it is critical to maintain precise lighting levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting – When used in conjunction with networked open loop daylight sensor.

Infrared receive capability – Enables sign-on identification to the networked system.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Targeted positioning – Directional wallmounting block allows sensors to be easily mounted and directed to the required area.

Dimensions:
66 x 70 x 61 mm (2.60 x 2.76 x 2.40 in)

Ordering Code:
12NC – 913703015409



DUS90WHB-D Multifunction Sensor

Wide-angle high bay DALI network sensor

The Philips Dynalite DUS90WHB-D is a 90 degree multifunction sensor that combines motion detection (PIR) and ambient light level detection (PE) in one device. The sensor uses the DALI protocol for power and communications to a network control system, eliminating the need for additional network field wiring. This is a wide angle, general purpose sensor.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Powered directly by the DALI network – Eliminates the need for any additional network field wiring.

Motion detection feature – Detects the presence or absence of motion and triggers a programmed action.

Ambient light level detection – In applications where it is critical to maintain precise lighting levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting – When used in conjunction with networked open loop daylight sensor.

Infrared receive capability – Enables sign-on identification to the networked system.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Targeted positioning – Directional wall-mounting block allows sensors to be easily mounted and directed to the required area.

Dimensions:
66 x 70 x 61 mm (2.60 x 2.76 x 2.40 in)

Ordering Code:
12NC – 913703015509



DUS30LHB-D Multifunction Sensor

Long-range high bay DALI network sensor

The Philips Dynalite DUS30LHB-D is a 30 degree multifunction sensor that combines motion detection (PIR) and ambient light level detection (PE) in one device. The sensor uses the DALI protocol for power and communications to a network control system, eliminating the need for additional network field wiring. This sensor is useful for long-range detection.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Powered directly by the DALI network – Eliminates the need for any additional network field wiring.

Motion detection feature – Detects the presence or absence of motion and triggers a programmed action.

Ambient light level detection – In applications where it is critical to maintain precise lighting levels, the PE function reads ambient levels and adjusts artificial light accordingly.

Daylight harvesting – When used in conjunction with networked open loop daylight sensor.

Infrared receive capability – Enables sign-on identification to the networked system.

Corridor hold – Links corridor areas with adjacent rooms so corridor remains lit while occupancy is detected in adjacent rooms.

Targeted positioning – Directional wallmounting block allows sensors to be easily mounted and directed to the required area.

Dimensions:
66 x 70 x 61 mm (2.60 x 2.76 x 2.40 in)

Ordering Code:
12NC – 913703015609





Relay
Controllers

DDRC-GRMS-E Multi-Protocol Switching Room Controller

Fully networked relay control solution

The Philips Dynalite DDRC-GRMS-E controller is a compact, versatile room automation and energy management solution with bridging functionality between the Ethernet LAN and connected DyNet devices. Bespoke pre-configuration allows deployment without the need for commissioning software. Incorporating switching relays and DMX for dimming and color control, every aspect of this device has been designed to be feature-rich and cost-effective.

Single box solution – Compact design allows for small installation footprint and reduced cabling for a simpler and faster installation.

Inbuilt Ethernet port – Directly connecting to a site's Ethernet LAN, the device can securely report its status and pass network messages.

Pre-programmed – Can be preloaded with a bespoke configuration to immediately meet the project's needs from the moment it powers up.

Powerful processor – The internal processor allows the device to perform advanced scripted functions and provide automated intelligent responses to multiple inputs.

Mixture of switching relays – Supports a combination of different relay ratings and types for a perfect blend of performance and cost-effectiveness.

18 dry contact inputs – Allows simple integration with third-party devices and systems.

32 channel DMX output – Adds color and dimming control for a touch of theatrics.

UL924 Input – Integrates seamlessly with compatible emergency systems.

Four digital outputs – Designed to drive room status indicator LEDs in common cathode configuration, and trigger additional devices such as doorbells.



DyNet output – Directly support the requirements of DyNet devices without the need for an additional network power supply.

Unique LAN addressing – DIP switches allow the installer to manually set the device's network identification..

Dimensions:
105 x 216 x 74 mm (4.13 x 3.74 x 2.91 in)

Ordering Code:
12NC – 913703334009

DDRC420FR Relay Controller

Robust control of switched loads

The Philips Dynalite DDRC420FR provides control of any type of switched load, including difficult lighting loads. This four-channel device supports all types of switched loads up to 20 A inductive.

Feed-through power circuit design – Electrically equivalent to a 4-pole contactor, with the added advantage of each pole being separately controllable via the DyNet network.

Flexible mounting solution – DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled circuit.

Inbuilt diagnostic functionality – Features circuit run time tracking on each channel and controller online/offline status indication.

Multiple wiring schemes supported – Controls single phase and neutral or three phase and neutral (star) wiring configurations.

Hardware override – Service override switch accessible from front panel.

Dimensions:
95 x 105 x 75 mm (3.74 x 4.34 x 2.95 in)

Ordering Code:
12NC – 913703244609



DDRC810DT-GL Relay Controller

Designed to operate any type of switched load

The Philips Dyalite DDRC810DT-GL is ideal for controlling bi-directional motors, such as curtain and blind motors. It is an eight channel device suitable for any switched load up to 10 A per channel, with a maximum box load of 40 A.

Voltage free changeover SPDT output relays – Perfect for controlling bi-directional motors.

Flexible mounting solution – A DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled circuit.

Inbuilt diagnostic functionality – Features circuit run time tracking on each channel.

Standalone or networked operation – Can operate as a discrete standalone unit, or as part of an integrated control system when connected to the DyNet network.

Dry contact inputs – The unit receives instructions from voltage-free button presses.

Dimensions:
94 x 211 x 75 mm (3.70 x 8.31 x 2.95 in)

Ordering Code:
12NC – 913703035209



DDRC1220FR-GL Relay Controller

Robust control of switched loads

The Philips Dyalite DDRC1220FR-GL provides control of multiple types of switched loads. This general-purpose 12-channel controller supports switched loads of up to 20 A per channel, up to a maximum device load of 180 A.

Feed-through power circuit design – Electrically equivalent to a 12-pole contactor, with the added advantage of each pole being separately controllable via the DyNet network.

Flexible mounting solution – DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled circuit.

Inbuilt diagnostic functionality – Features circuit run time tracking on each channel and controller online/offline status indication.

Multiple wiring schemes supported – Controls single phase and neutral or three phase and neutral (star) wiring configurations.

Hardware override – Service override switch accessible from front panel.

Dimensions:
93 x 215 x 64 mm (3.66 x 8.46 x 2.52 in)

Ordering Code:
12NC – 913703243009



DMRC210 Relay Controller

Luminaire mount control of switched loads

The Philips Dynalite DMRC210 is a two channel device that provides intelligent networked control of individual lighting fixtures. The compact design enables mounting directly within the gear enclosure of many lighting fixtures.

Incorporates two relay outputs – Used to control mains supply to the fixture.

Gear enclosure mounting – Compact design allows the device to be mounted directly within the gear enclosure of many light fittings.

Fully rated device – Robust relays provide reliable control of difficult lighting loads.

Inbuilt diagnostic functionality – Features controller online/offline status indication.

Dimensions:
240 x 45 x 38 mm (9.45 x 1.77 x 1.50 in)

Ordering Code:
12NC – 913703050009



Power Dimmers





КВАНТОРИУМ

Quantorium – Children's Palace,
V Pyshma, Russia

DDLEDC605GL PWM Controller

Directly drive LED fittings with PWM voltage-mode outputs

The Philips Dynalite DDLEDC605GL is designed to control LED loads in decorative architectural lighting applications where creative color mixing and sequencing is required. The controller provides six pulse width modulated common anode voltage mode outputs, suitable for directly driving high intensity LED sources. The controller is designed for connection to an external DC power supply, enabling the unit to deliver a range of nominal output voltages. The Philips Dynalite DDLEDC605GL is DMX512 compatible and is suitable for the high chase speeds commonly found in display lighting.

Designed for connection to external power supply – The device is connected to an external DC power supply, enabling the unit to deliver a range of nominal output voltages.

DMX512 compatible – Capable of receiving native DMX512, allowing use in color mixing or chase sequence applications, such as those found in display lighting.

Diagnostic functionality – Controller online/offline status reporting.

Flexible mounting solution – A DIN-rail mountable device, designed to be installed into a distribution board or other electrical enclosure.

Naturally ventilated – Requires no forced cooling or maintenance.

Dimensions:
95 x 105 x 75 mm (3.74 x 4.13 x 2.95 in)

Ordering Code:
12NC – 913703061209



Signal Dimmers



DDBC120-DALI DALI-2 Driver Controller

Full DALI-2 control solution with inbuilt DALI power supply and driver power management

The Philips Dyalite DDBC120-DALI is ideal for small-scale projects looking for a compact, all-in-one DALI control solution. This controller operates seamlessly with all other Dyalite controllers, sensors, user interfaces and head-end software.

Single-master solution – Compatible with a range of DALI fittings and devices, including DALI fluorescent drivers, DALI electronic low voltage transformers, DALI LED fixtures, DALI emergency lighting fixtures and Philips Dyalite DALI sensors and user interfaces.

Auto-enumeration – Provides automatic enumeration of drivers when powered on and enables self-repair of the network if a driver fails and is replaced.

Fully scalable network solution – Direct mapping from DALI to the DyNet network protocol eliminates DALI imposed limits, such as maximum group sizes.

Compatible with DALI 209 drivers – Provides control of tunable white luminaires.

Dual functionality – Leverage advantages of a true DALI network solution, whilst still allowing the full functionality of DyNet network control.

Built-in energy savings – Control signals can be configured to operate in tandem with the internal relay, which automatically isolates the power circuit when all associated channels are at 0%.

Integral DALI bus power supply – Removes the need for provision of a separate external power supply and reduces distribution board wiring complexity.



Inbuilt diagnostic functionality – Features lamp and driver failure reporting, driver run time tracking for each driver, emergency test reporting and device/driver online/offline status indication.

Dimensions:
96 x 105 x 75 mm (3.78 x 4.34 x 2.95 in)

Ordering Code:
12NC – 913703685109

DDBC320-DALI DALI-2 Driver Controller

Full DALI-2 control solution with inbuilt DALI power supply and driver power management

The Philips Dyalite DDBC320-DALI is a three-universe controller, ideal for large-scale projects looking for a powerful all-in-one DALI control solution. This controller operates seamlessly with all other Dyalite controllers, sensors, user interfaces and head-end software, and includes a secured Ethernet port for network communication.

Single-master solution – Compatible with a range of DALI fittings and devices including DALI fluorescent drivers, DALI electronic low voltage transformers, DALI LED fixtures, DALI emergency lighting fixtures and Philips Dyalite DALI sensors and user interfaces.

Compatible with DALI 209 drivers – Provides control of tunable white and RGBWAF luminaires.

Driver standby power elimination – Internal switched relay automatically isolates each universe's power circuit when all drivers are dimmed to 0%.

Independent universe enumeration – Commission each universe individually without affecting other universes or controller functionality.

UL924 Input – Integrates seamlessly with compatible emergency systems.

Auto-enumeration – Provides automatic enumeration of drivers when powered on and enables self-repair of the network if a driver fails and is replaced.

Silent enumeration – Constantly checks the DALI bus for changes, automatically enumerating individual driver replacements with no disruption to lighting performance.

Fully scalable network solution – Direct mapping from DALI to the DyNet network protocol eliminates DALI imposed limits, such as maximum group sizes.

Inbuilt Ethernet port – Directly connecting to a site's LAN, the device can securely report its status and pass network messages via the Dyalite PDDEG-S.

Driver management tools – Includes lamp and driver status reporting, driver runtime tracking, and emergency test reporting.



Dual functionality – Leverage advantages of a true DALI network solution, whilst still providing access to the full DyNet feature set.

Flexible mounting solution – A DIN-rail mountable device, designed to be installed into the distribution board, supplying power to the controlled lighting circuit.

Integral DALI bus power supply – Removes the need for provision of a separate external power supply and reduces distribution board wiring complexity.

Dimensions:
95 x 216 x 64 mm (3.74 x 8.5 x 2.52 in)

Ordering Code:
12NC – 913703031209

DDBC516FR Signal Dimmer Controller

Flexible control of 1-10 V and DALI drivers

The Philips Dyalite DDBC516FR is a five-channel device for controlling DALI drivers. Each control output is selectable to DALI broadcast, DALI addressed, 1-10 V or DSI.

Multiple protocols supported – Each of the five control outputs supports DALI broadcast (maximum ten DALI loads/channel), DALI addressed (maximum ten DALI loads/channel), 1-10 V (maximum 10 mA sink or source/channel) or DSI (maximum five DSI loads/channel).

Built-in energy savings – Control signals can be programmed to operate in tandem with five internal switched outputs, which will automatically isolate the power circuit when all associated channels are at 0%. This is a useful feature as DALI drivers would otherwise draw significant power when lamps are turned off via a DALI command.

Integral DALI bus power supply – Removes the need for an additional external device.

Flexible mounting solution – A DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled circuit.

Inbuilt diagnostic functionality – Features lamp and driver failure reporting, driver run time tracking for each driver and the switched output, as well as controller online/offline status indication.

Dimensions:
94 x 211 x 75 mm (3.70 x 8.31 x 2.95 in)

Ordering Code:
12NC – 913703031509



DDBC1200 Signal Dimmer Controller

Multi-protocol control solution

The Philips Dyalite DDBC1200 features 12 independent output channels, each selectable to DALI Broadcast, 1-10 V or DSI. The device can also be linked to a separate relay module for control of 1-10 V drivers.

Multiple protocols supported – Compatible with a range of fittings and devices including; DSI drivers, DSI electronic low voltage transformers, DALI drivers (broadcast mode only), DALI electronic low voltage transformers (broadcast mode only), 1-10 V drivers and devices that require 0-10 V analog control signals.

LED status indicators – Instant visual feedback on channel status of all 12 outputs.

Flexible mounting solution – A DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled lighting circuit.

Inbuilt diagnostic functionality – Features controller online/offline status indication.

Dimensions:
93 x 215 x 64 mm (3.66 x 8.46 x 2.52 in)

Ordering Code:
12NC – 913703333909



DBC905 Signal Dimmer Controller

Easy to install controller with flexible mounting options

The Philips Dynalite DBC905 is a nine-channel signal dimmer controller, designed for direct installation within ceiling cavities. The device incorporates structured wiring connectors, to enable quick connection without the use of tools.

Multiple protocols supported – Each control output supports DALI broadcast, DALI addressed, 1-10 V and DSI protocols.

Integration ease – Integrates easily with a Building Management System (BMS) via the DyNet control network, making it ideally suited to commercial office installations.

No tools required – The device is available with connectors suited to three major modular wiring brands – CMS Electracom, Wieland and Wago.

Inbuilt diagnostic functionality – Includes lamp and driver failure, circuit run time tracking/lamp life, automated battery tests and controller online/offline status indication.

High capacity option available – Offers increased capacity, 200 A surge switched outputs and seven DALI loads or ten 1-10 V loads per channel.

Dimensions:
189 x 416 x 35 mm (7.44 x 16.38 x 1.38 in)

Ordering Code:

CMS connectors	12NC – 913703040509
Wieland connectors	12NC – 913703040009
Wago - high capacity	12NC – 913703040209
CMS - high capacity	12NC – 913703040609
Wieland - high capacity	12NC – 913703040109



DMBC110 Signal Dimmer Controller

Luminaire mount multi-protocol control solution

The Philips Dynalite DMBC110 provides intelligent networked control of individual lighting fixtures. The compact design enables versatile and convenient installation.

Incorporates one relay output and one signal dimmer output – Provides dimming control of DALI, 1-10 V and DSI compatible drivers and transformers.

Gear enclosure mounting – Compact design allows the device to be mounted directly within the gear enclosure of many light fittings.

Fully rated device – Robust relay provides reliable control of difficult lighting loads.

Dimensions:
240 x 45 x 38 mm (9.45 x 1.77 x 1.50 in)

Ordering Code:
12NC – 913703030009



Multipurpose Controllers



DDMC802 Multipurpose Modular Controller

Control different load types with one device

The Philips Dynalite DDMC802 provides up to eight configurable output channels, controlled by up to four interchangeable control modules. A selection of control modules is available for a variety of load types.

Single controller solution – Control a variety of load types from one device.

Four module bays – Accommodates any combination of up to four single modules or two double-size modules.

Leading edge phase control dimmer module – Suitable for use with incandescent lamps and some types of dimmable electronic transformers.

Trailing edge phase control dimmer module – Suitable for use with most types of dimmable electronic transformers.

Signal dimmer control module – Suitable for 1-10 V, DSI, and DALI Broadcast control, including DALI 209 tunable white drivers.

Relay control module – Suitable for controlling most types of switched loads.

Fan control module – 400 VA three-speed fan control.

Curtain control module – Provides control of curtains, blinds and other motorized window treatments.

Flexible mounting solution – DIN-rail mountable device, designed to be installed into the distribution board supplying power to the controlled circuit.

Dimensions:
95 x 216 x 74 mm (3.74 x 8.50 x 2.91 in)

Ordering Code:
12NC - 913703243509



Modules:

DGCM102	1 x 2 A Motorized curtain/blind control	12NC - 913703024409
DGFM102	1 x 2 A Fan control	12NC - 913703026709
DGRM204	2 x 4 A Relay control	12NC - 913703261109
DGBM200	2 Channel Signal dimmer driver	12NC - 913703261209
DGLM105	1 x 5 A Leading edge dimmer	12NC - 913703260809
DGLM202	2 x 2 A Leading edge dimmer	12NC - 913703260909
DGLM402	4 x 2 A Leading edge dimmer	12NC - 913703261009
DGTM104	1 x 4 A Trailing edge dimmer	12NC - 913703260609
DGTM202	2 x 2 A Trailing edge dimmer	12NC - 913703260709
DGTM402	4 x 2 A Trailing edge dimmer	12NC - 913703024309

DMC2 Multipurpose Modular Controller

Control different load types with one device

The Philips Dynalite DMC2 provides multichannel control via two interchangeable output modules. The device is available with a variety of control modules to handle various load types and capacities.

Single controller solution – Control a multitude of load types from one device, suited to any segment requiring lighting or switched control.

Phase-cut dimmer module – Selectable per channel for leading or trailing edge output. Compatible with most dimming loads.

Signal dimming module – Suitable for controlling 1-10 V, DSI and DALI broadcast drivers. Built-in relays remove power when channel level is at 0%.

Relay control module – Suitable for controlling most types of switched loads.

Flexible mounting solution – Surface or recess mountable enclosure.

Passive cooling – Fanless design reduces noise, power consumption and maintenance costs.

Dimensions:
540 x 380 x 103 mm (21.26 x 14.96 x 4.06 in)

Ordering Code:

DMC2-CE	12NC – 913703666109
DMC2-UL	12NC – 913703666009

For modules, refer to next page.



DMC4 Multipurpose Modular Controller

Control different load types with one device

The Philips Dynalite DMC4 provides multichannel control via four interchangeable output modules. The device is available with a variety of control modules to handle various load types and capacities.

Single controller solution – Control a multitude of load types from one device, suited to any segment requiring lighting or relay control.

Phase-cut dimming module – Selectable per channel for leading or trailing edge output. Compatible with most dimming loads.

Signal dimming module – Suitable for controlling 1-10 V, DSI and DALI broadcast drivers. Built-in relays remove power when channel level is at 0%.

Relay control module – Suitable for controlling most types of switched loads.

Flexible mounting solution – Surface or recess mountable enclosure.

Passive cooling – Fanless design reduces noise, power consumption and maintenance costs.

Dimensions:
830 x 455 x 106 mm (32.68 x 17.91 x 4.17 in)

Ordering Code:

DMC4-CE	12NC – 913703667909
DMC4-UL	12NC – 913703667809

For modules, refer to next page.



DMC Control Modules

Name	Description	Ordering Code
DSM2	DMC2 Supply module	12NC – 913703500509
DSM4	DMC4 Supply module	12NC – 913703668009
DCM-DyNet	DyNet Comms module	12NC – 913703666209
DMD310-CE	3 x 10 A Signal dimmer driver	12NC – 913703666609
DMD310-RCBO-CE	3 x 10 A Signal dimmer driver	12NC – 913703667109
DMD316-CE	3 x 16 A Signal dimmer driver	12NC – 913703666709
DMD316-RCBO-CE	3 x 16 A Signal dimmer driver	12NC – 913703667209
DMD316-UL	3 x 16 A Signal dimmer driver	12NC – 913703667509
DMD316FR-UL	3 x 16 A Signal dimmer driver	12NC – 913703668709
DMR310-CE	3 x 10 A Relay controller	12NC – 913703666409
DMR310-RCBO-CE	3 x 10 A Relay controller	12NC – 913703666909
DMR316-CE	3 x 16 A Relay controller	12NC – 913703666509
DMR316-RCBO-CE	3 x 16 A Relay controller	12NC – 913703667009
DMR316-UL	3 x 16 A Relay controller	12NC – 913703667409
DMR610GL-CE	6 x 10 A Relay controller	12NC – 913703668209
DMR610GL-RCBO-CE	6 x 10 A Relay controller	12NC – 913703668309
DMR610GL-UL	6 x 10 A Relay controller	12NC – 913703668109
DMP310GL-CE	3 x 10 A Phase-cut dimmer	12NC – 93703666809
DMP310GL-RCBO-CE	3 x 10 A Phase-cut dimmer	12NC – 913703667309
DMP310GL-UL	3 x 10 A Phase-cut dimmer	12NC – 913703667609
DMP603GL-CE	6 x 3 A Phase-cut dimmer	12NC – 913703668509
DMP603GL-RCBO-CE	6 x 3 A Phase-cut dimmer	12NC – 913703668609
DMP603GL-UL	6 x 3 A Phase-cut dimmer	12NC – 913703668409
DMP116	1 x 16 A Phase-cut dimmer	12NC – 913703348309

Integration Devices



DDNG232 RS-232 Network Gateway

DIN-rail serial port integration

The Philips Dynalite DDNG232 network gateway provides cost-effective serial port integration between a DyNet network and third-party systems.

Seamless integration with third-party systems – Including AV systems, lighting desks, data projectors, HVAC, BMS and security systems.

Internal controls – Programmable logic controller capable of comprehensive conditional and sequential logic and arithmetic function processing.

Predefined data format library or create your own – A library of data formats is available for systems integrators, or can be created using the onboard conditional logic engine to assemble and transmit user-defined data strings.

Macro functions available – To simplify the control of multiple devices.

Flexible mounting solution – DIN-rail mountable, designed to be installed into a distribution board or other electrical enclosure.

Dimensions:
94 x 211 x 75 mm (3.70 x 8.31 x 2.95 in)

Ordering Code:
12NC – 913703081809



DDNG-KNX KNX Gateway

High level KNX integration

The Philips Dynalite DDNG-KNX allows for high level integration between a Philips Dynalite system and BMS using the KNX protocol.

Directly trigger tasks – Use the building management system (BMS) to directly control DyNet functions.

Status request – Interrogate a Philips Dynalite system to request current status information.

User controls included – DyNet/KNX service switches and DyNet/KNX diagnostic LEDs.

Dimensions:
95 x 105 x 75 mm (3.74 x 4.34 x 2.95 in)

Ordering Code:
12NC – 913703080509



DLLI8180 Dry Contact Interface

Eight-way dry contact interface

The Philips Dynalite DLLI8180 is an eight-way dry contact interface with LED indicator outputs, that allows mechanical and electronic switches to communicate directly to the DyNet network.

Compact size – Allows installation in electrical wall boxes for easy integration with third-party user interfaces.

Eight dry contact inputs – Each dry contact trigger is individually programmable for a range of tasks.

Eight indicator outputs – Each output is individually programmable to drive an external LED indicator sharing a common cathode, communicating current system status or settings.

Allows up to 20 m cable runs – Enables convenient connection to dry contact interfaces in multiple rooms.

Dimensions:
53 x 30 x 15 mm (2.09 x 1.18 x 0.59 in)

Ordering Code:
12NC – 913703023009



DPMI940-D Dry Contact Interface

Four-way DALI dry contact interface

The Philips Dynalite DPMI940-D is a four-channel input dry contact interface, designed to allow mechanical and electronic switches to interface directly with a DALI network and a Philips Dynalite system.

Fully programmable – Each individual input is fully software programmable over the DALI network, allowing for multiple functions to be performed such as select lighting scene, room join or toggle lighting on/off.

DALI device – Designed to operate seamlessly with the Philips Dynalite DDBC120-DALI or DDBC320-DALI controller.

Powered directly by the DALI network
– Eliminates the need for any additional network field wiring.

Compact size – Inputs are presented on flyleads, making the device suitable for installation behind multi-gang switch grids.

Simple dry contact interface – Can be used for low level integration to third-party systems such as security and air conditioning so that the lighting can be coordinated together with other services found within a project.

Dimensions:
Housing: 18 x 34 x 53 mm (0.71 x 1.34 x 2.09 in)
Flyleads: 165 mm (6.50 in) long with bootlace

Ordering Code:
12NC – 913703080609



DDMIDC8 Low Level Input Integrator

Flexible input integration

The Philips Dynalite DDMIDC8 is designed to enable cost-effective input integration to the Philips Dynalite control system from third-party systems such as security, HVAC and BMS.

Eight digital inputs – Each can be individually configured as a dry contact or 0–24V AC/DC input.

LED indicator on each input – Provides visual status indication.

Optical isolation – All inputs isolated for high noise immunity.

Four 0-5/0-10 V analogue inputs – Software selectable.

Programmable Logic Controller – Processes comprehensive conditional and sequential logic and arithmetic functions.

Dimensions:
95 x 105 x 75 mm (3.74 x 4.34 x 2.95 in)

Ordering Code:
12NC – 913703081109



DDFCUC Fan Coil Unit Controller

Direct control of air conditioning

The Philips Dynalite DDFCUC is a fan coil unit controller, designed for direct connection to components commonly found in heating, ventilation, and air conditioning (HVAC) systems with fan coil units (FCU).

0-10 V and TRIAC (0-24 V) valve outputs – Provided for control of hot and cold water valves.

0-10 V fan output – Silent, accurate speed signal control of compatible fans.

1 to 3-speed fan output – Switched control of LOW/MED/HIGH fan settings.

GPR (General Purpose Relay) – Provided for use with electrical heaters or power outlet switching via an external contactor.

Suitable for non-seasonal two-pipe systems – Refer to the easy-to-follow DDFCUC Installation Instructions and DDFCUC Commissioning Guide for more information.

Configurable inputs – For use with peripheral devices including smoke detector, motion detector, window open/close sensor, airflow detector, drip tray overflow, dirty air filter, and hot water on cold valve. Supports 0–10 V, dry contact, and 20 k Ω NTC sources.

0-10V valve position feedback – With compatible valves, INPUT1 and INPUT2 can capture position feedback for control outputs VALVE1 and VALVE2 respectively.

Resistive or networked temperature sensors – Allows the device to use data from a local temperature sensor, or networked temperature sensor such as an Antumbra or Revolution user interface.

Networkable – Can be networked with other Dynalite equipment via the onboard RS-485 DyNet port.

Dimensions:
95 x 108 x 64 mm (3.74 x 4.25 x 2.52 in)

Ordering Code:
12NC – 913703367009



Network Devices



PDDEG-S Ethernet Gateway - Supervisor

Secure remote connection to the Dynalite System

The Philips Dynalite PDDEG-S provides gateway services between Ethernet and DyNet devices, enabling secure online access to the Philips lighting control system. The gateway enables lighting control via a dedicated Philips app, and access to the timeclock, schedule editor and diagnostic functions via an inbuilt web server.

System supervisory functions –

Includes online/offline status reporting for connected devices, network traffic logging, secure remote firmware update and lighting control metrics. Inbuilt timeclock and schedule manager allow the user to manage automated operations and task scheduling.

Multiple integration options – Supports TCP/UDP, IPv4/IPv6, unicast/multicast/broadcast, DyNet1, DyNet2, Fidelio, BACnet, and 'Text and Binary Integration' protocols. Capable of supporting hundreds of socket connections concurrently.

Flexible connectivity options –

provides secure cloud connectivity to the building with user configurable routing and a choice of RS-485 and Ethernet bridging functions.

Powerful custom task engine –

Allows users or third-party systems to run macros such as 'After Hours', 'Shut Down', 'Welcome' and more.

Web server and app access – Enables remote access for lighting control, schedule editing and device configuration.

Secure connection to Dynalite

controllers – Each PDDEG-S supports encrypted communication with up to 25 Ethernet-equipped controllers, including the DDBC320-DALI and DDRG-GRMS-E.

Dimensions:

95 x 216 x 65 mm (3.74 x 8.50 x 2.56 in)

Ordering Code:

12NC – 913703027409



BACnet License

PDDEG-S BACnet	100 point license	SW913703370509
PDDEG-S BACnet	1k point license	SW913703370609
PDDEG-S BACnet	5k Point license	SW913703370709
PDDEG-S BACnet	10k Point license	SW913703370809
Tridium VYKON JACE® 8000 controller	DyNet driver and license	12NC 913703097109

PDEG Ethernet Gateway

Flexible Ethernet integration

The Philips Dynalite PDEG provides a multipurpose Ethernet connection to a Philips lighting control system. It supports access to the lighting system via a dedicated Philips app as well as providing a web interface delivering access to the inbuilt timeclock and schedule editor functions. It provides bridging functionality between Ethernet backbone and the DyNet fieldbus devices.

Large storage capacity – The device stores large project files internally, which apps use to automatically configure their settings. This saves configuration time and ensures accuracy for phone and tablet control.

Built-in web server – Provides control and status via Common Gateway Interface (CGI) protocol. Allows the user to edit and check system settings via the Network Hardware Checker and System Roll Call tools.

No technical skills needed – Inbuilt timeclock and schedule manager allow the user to manage operation and task scheduling without advanced technical knowledge.

Powerful custom task engine –

Allows users or third-party systems to run macros, such as 'After Hours', 'Shut Down', 'Welcome' and more.

Advanced interoperability –

Supports management of Philips Dynalite devices and Philips PoE fittings on a single system.

Dimensions:

97 x 110 x 38 mm (3.82 x 4.33 x 1.50 in)

Ordering Code:

12NC – 913703013809



PDEB Ethernet Bridge

Inexpensive Ethernet integration

The Philips Dynalite Ethernet Bridge provides a standard Ethernet connection to a Philips lighting control system in applications ranging from tunnels to hotel rooms. It provides bridging functionality between an Ethernet backbone and DyNet devices.

Powerful custom task engine – Allows users or third-party systems to trigger macros such as 'After Hours', 'Shut Down', 'Welcome' and more.

Versatile mounting options – Hybrid mounting clips allow the device to be mounted on a DIN-rail or to any flat surface.

Dimensions:
97 x 110 x 38 mm (3.82 x 4.33 x 1.50 in)

Ordering Code:
12NC – 913703240009



DDNG485 RS-485/DMX512 Gateway

Flexible network communications gateway

The Philips Dynalite DDNG485 is a flexible network communications bridge designed for RS-485 networks. The two optically isolated RS-485 ports enable the DDNG485 to implement a trunk and spur topology on large project sites, with the bridge providing a high-speed backbone optically coupled to many lower speed spurs.

Route DyNet to third-party systems – Such as audio-visual, Modbus meters, and building automation systems, providing an integrated approach to total building control and energy management.

DMX512 mode – Transmit or receive up to 512 channels of DMX with automatic DyNet conversion and task triggering. Provides temporary control of house lights from the DMX console in an auditorium scenario

Electrical fault isolation – Faults can be isolated to individual network spurs.

Internal controls – Programmable logic controller capable of comprehensive conditional and sequential logic and arithmetic function processing, packet filtering and DyNet to DyNet 2 translation.

Flexible mounting solution – DIN-rail mountable, designed to be installed into a distribution board or other electrical enclosure.

Dimensions:
95 x 108 x 64 mm (3.74 x 4.25 x 2.52 in)

Ordering Code:
12NC – 913703366709



DDTC001 Timeclock

Astronomical 365 day timeclock

The Philips Dynalite DDTC001 timeclock provides a tamper resistant solution for time-based event control on a DyNet network.

Remote programming – The device is programmed via a PC and there are no external controls available, providing a tamper resistant solution.

Advanced clock controls – Features sunrise/sunset tracking and automatic adjustment for daylight saving.

Performs as an energy management controller – Uses powerful macro and conditional logic functions to provide full automation of large commercial projects, where automatic lighting events are required at predetermined times.

Flexible mounting solution – DIN-rail mounted device, designed to be installed into a distribution board.

Dimensions:
86 x 35 x 58 mm (3.34 x 1.38 x 2.28 in)

Ordering Code:
12NC – 913703074009



DTK622-USB PC Node

PC connection node

The Philips Dynalite DTK622-USB is a PC node that provides a connection to a PC using a USB connection.

Useful interface for any PC – Complete access to all network messages present on the DyNet network.

Commissioning and maintenance tool – To be used in conjunction with any of the Philips Dynalite software, this PC node can be used to commission, diagnose or repair with Philips Dynalite System Builder.

Complete solution – Includes USB flash drive with the required drivers.

Dimensions:
24 x 51 x 91 mm (0.94 x 2.01 x 3.58 in)

Ordering Code:
12NC – 913703090209



DTK622-232 Serial Port Node

Serial port connection node

The Philips Dynalite DTK622 is a network gateway that provides passive integration to a PC or RS-232 system.

Full duplex integration – Useful for linking a Philips Dynalite system with an AV or air conditioning system that supports RS-232.

Permanent PC connection – Can be used as a permanent gateway to the system for the Philips Dynalite System Manager head-end software.


Dimensions:

24 x 51 x 91 mm (0.94 x 2.01 x 3.58 in)

Ordering Code:

12NC - 913703090109



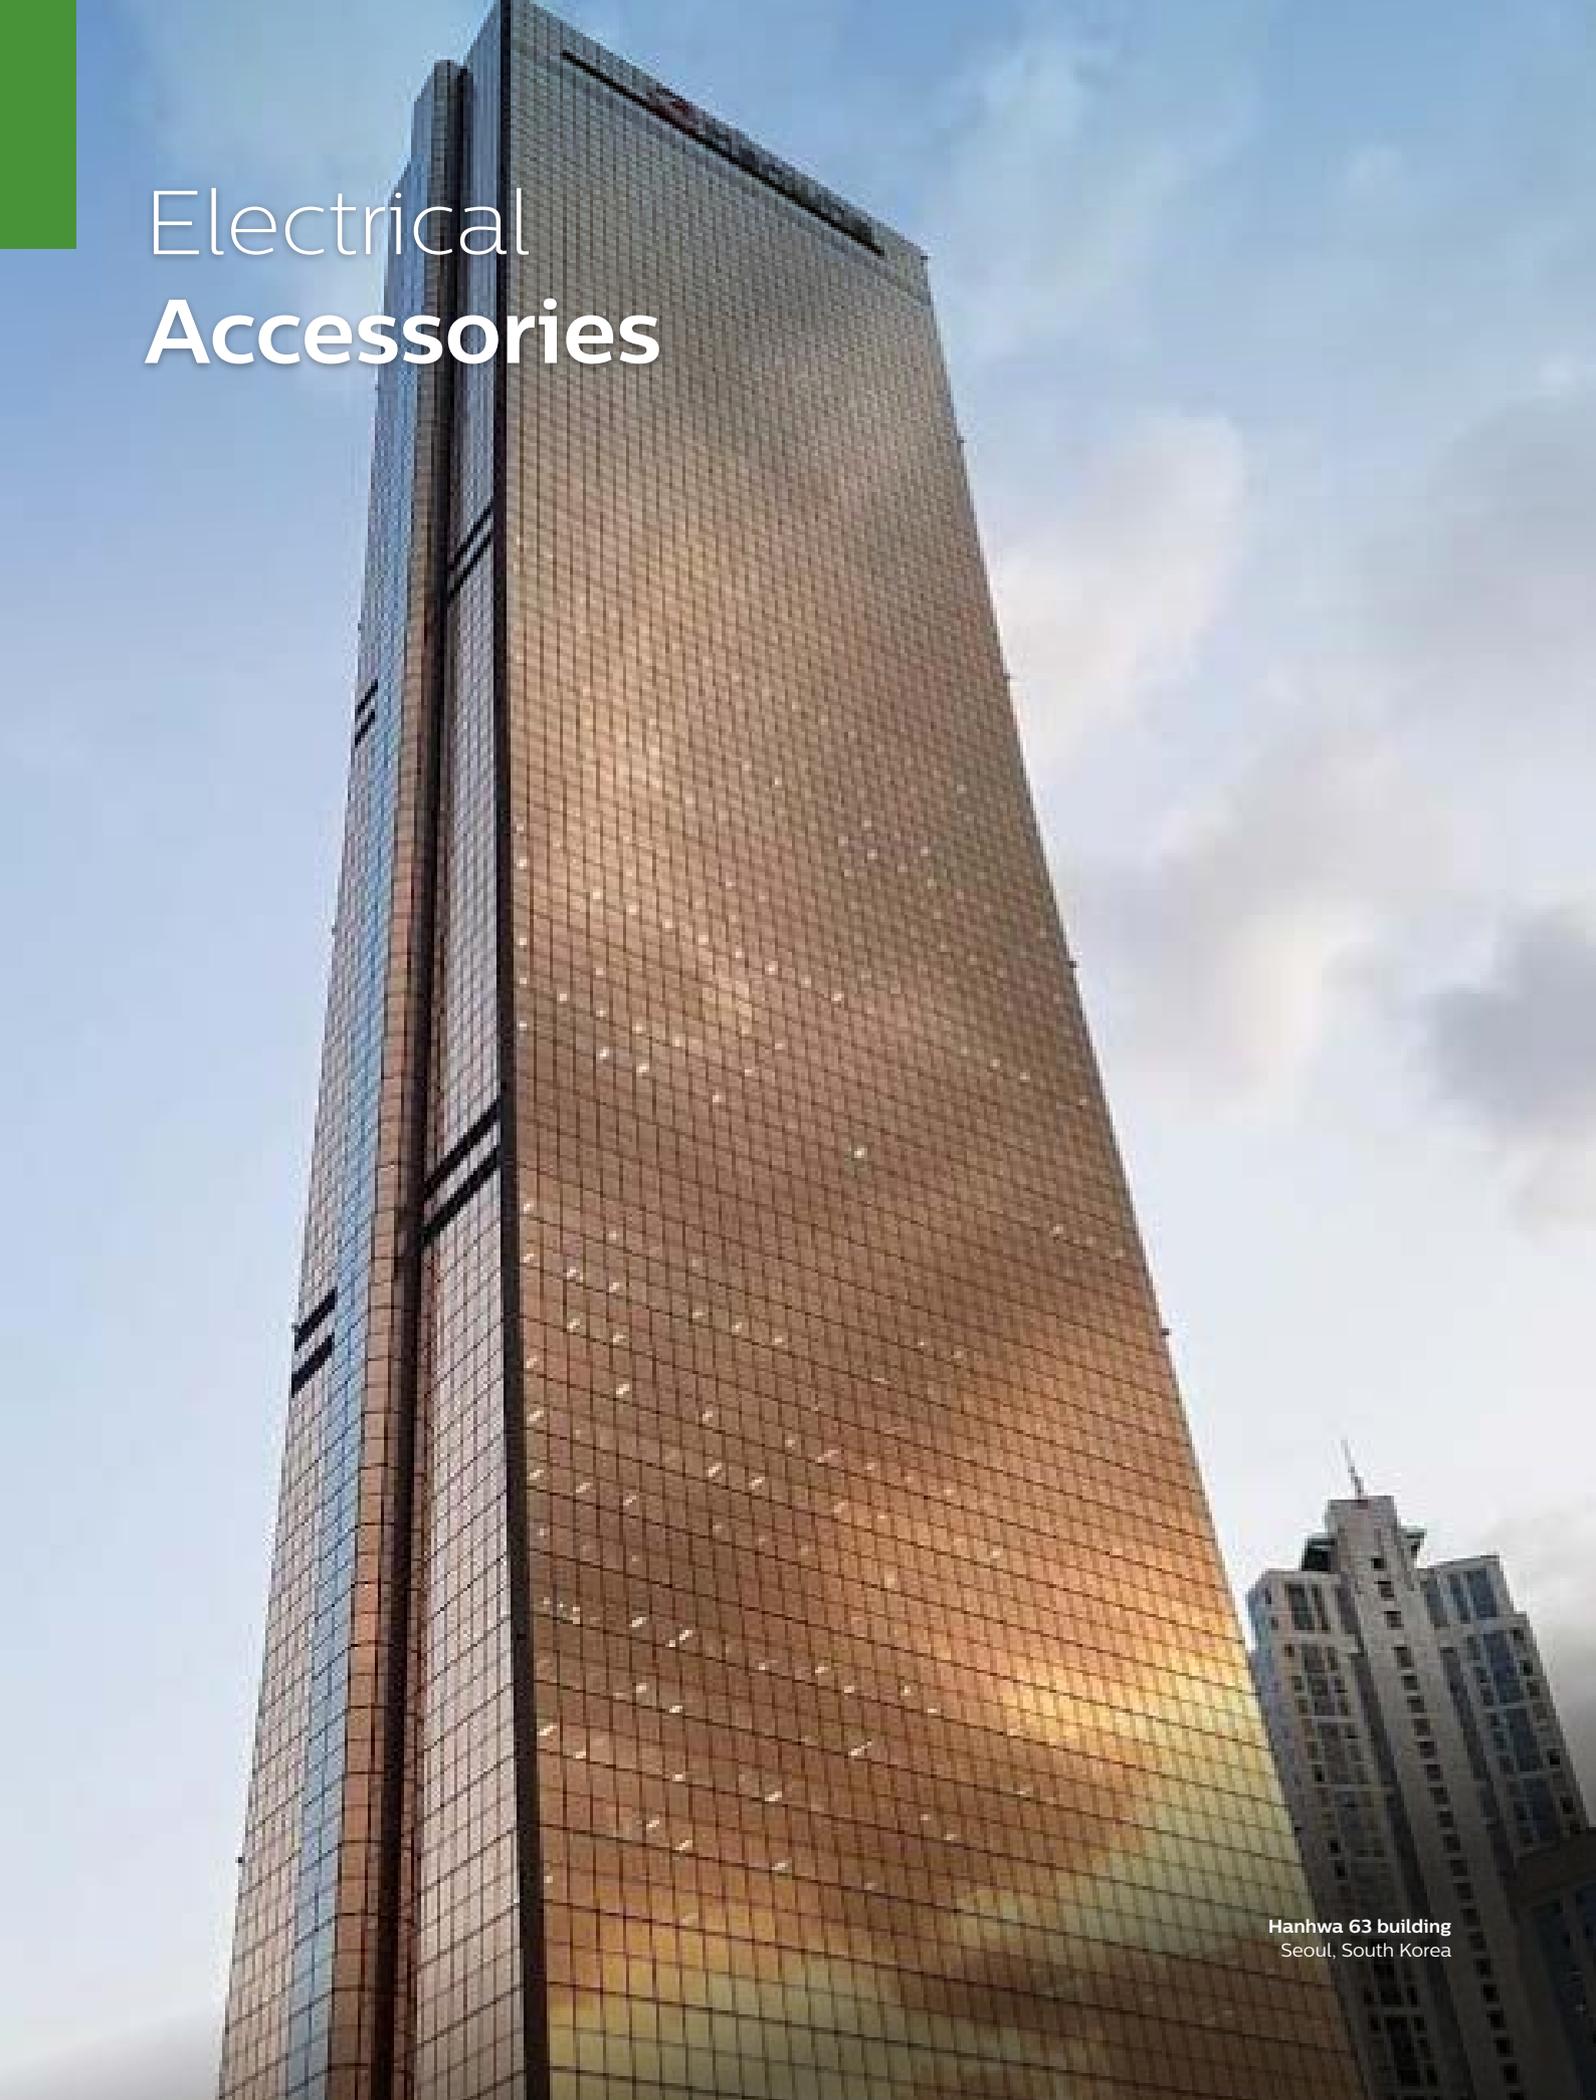

Electrical Accessories

Hanhwa 63 building
Seoul, South Korea

PAEFE Antumbra Electrical Frames

Power, data, and audiovisual wiring frames

Stylish wiring solutions for any project.

Dynalite has partnered with Simon Electric to exclusively provide the perfect combination of power and connectivity options for a complete project offering.

Our frames, available in one- to four-gang sizes, are designed to match Antumbra European panels in size and color.



Antumbra styling – Designed to match the Antumbra range of user interfaces for a consistent look and feel throughout your project.

Range of frame sizes – Holds any combination of one to four modules per frame.

Décor-matching options – Frames and modules are available in a range of attractive metallic finishes.

Designed to pair with any electrical module from the Simon Electric V8 range – Mains outlets, networking ports, audiovisual connectors, room status indicators, doorbells, and more.

Dimensions:
 88 x 88 x 5 mm (3.46 x 3.46 x 0.20 in)
 176 x 88 x 5 mm (6.93 x 3.46 x 0.20 in)
 264 x 88 x 5 mm (10.39 x 3.46 x 0.20 in)
 352 x 88 x 5 mm (13.86 x 3.46 x 0.20 in)

Ordering Codes:

Metal Frame Plastic Rim & Inset	Aluminium White	Gold White	Jet Grey Black	Noir Black	Prestige White	Vintage Black
	913703062109	913703064609	913703061909	913703061709	913703064509	913703061809
	913703065109	913703070709	913703064909	913703064709	913703070609	913703064809
	913703071609	913703071809	913703071509	913703070809	913703071709	913703070909
	913703072509	913703072709	913703072409	913703072209	913703072609	913703072309

DDNP1501 Network Power Supply

Supplements DyNet network DC supply

The Philips Dynalite DDNP1501 is a 15 V DC 1.5 A regulated power supply designed to supplement the DyNet network DC supply.

No manual selection required – The switch-mode design allows the device to be used with a range of input voltages.

Used when high consumption devices are employed – The DyNet network is self-powered via built-in DC supplies integrated within all mains powered devices.

Flexible mounting solution – A DIN-rail mountable device, with a circuit breaker profile designed to be installed into all types of distribution board enclosures, including those with cover apertures specifically designed for circuit breakers.

Dimensions:
 95 x 105 x 75 mm (3.74 x 4.34 x 2.95 in)

Ordering Code:
 12NC – 913703090309



DMAL120F Active Load

Reduces lamp flicker and improves dimming performance

The Philips Dynalite DMAL120F provides correct load conditions for leading edge dimmers, delivering improved dimming performance and reduced lamp flicker in LED and CFL light sources. It achieves this by connecting across the line and neutral wires at any point along a lighting circuit.

Reduces capital outlay – Allows continued use of leading edge dimming methodology when lamps have been updated to more efficient LED and CFL technologies.

Equally suitable for trailing edge dimming – Delivers a better dimming range on LED and CFL lightsources.

Compact design – Enables the unit to be mounted directly within the same enclosure as the load controller, or in the field with LED & CFL lamps.

Note – This device is not suitable for elimination of LED flicker resulting from mains supply instability.

Dimensions:
240 x 45 x 38 mm (9.45 x 1.77 x 1.50 in)

Ordering Code:
12NC – 913703061609



DyNet-STP-CABLE-LSZH Cat 5e Cable

100 MHz 100 Ω STP 4 pair Cat 5e

DyNet data cable is specifically designed for high reliability RS-485 network wiring. In addition to a twisted pair for RS-485 data, conductors are provided to supply DC power to network powered devices.

Overall shield for maximum data integrity – The data cable is flexible and all conductors are stranded.

Fast termination – Designed for robust termination into pressure-plate style terminals.

Extra thick outer jacket – Mains rated for use in distribution boards.

Supplied in 305 meter roll.

Dimensions:
Cable length: 305 m (1000.61 ft)

Ordering Code:
12NC – 913703898809



DyNet-SFLAT6-CABLE Flat Cable

Cable roll and cable kits for faster installation

Flat data cable is specifically designed for high reliability localized network wiring. In addition to a conductor pair for data, conductors are provided to supply DC power to network powered devices.

Overall shield for maximum data

integrity – The data cable is flexible and all conductors are stranded.


Fast termination – Designed for rapid crimp termination into RJ12 plugs for use with Philips Dynalite products supporting RJ12 sockets.

Supply options – Available in 200 m (656.17 ft) rolls or in pre-terminated leads of 0.5, 5 and 10 m (1.64, 16.40 and 32.81 ft) lengths.

Utilize DDPB22-RJ12 network junction box for faster installation – Facilitates termination of 22 DyNet flat cables in one location.

Ordering Code:

200 m (656.17 ft) roll	12NC – 913703095009
10 m (32.81 ft) lead	12NC – 913703898909
5 m (16.40 ft) lead	12NC – 913703899009
0.5 m (1.64 ft) lead	12NC – 913703899109

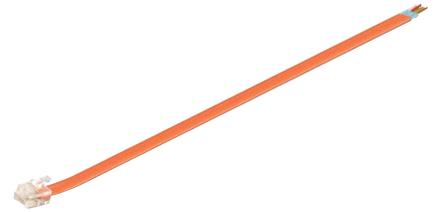

DH2X24 DIN Rail Enclosure

Safe, flexible housing for DIN rail devices

The Philips Dynalite DH2X24 is a wall-mounted enclosure with two 24-unit DIN rails, designed for easy mounting and housing of Dynalite DIN rail products. The enclosure includes a removable front cover, removable DIN rail plate, and a variety of cabling knockouts along the side, top and bottom for safe and convenient installation.

Galvanized steel body – Extremely durable construction, designed to keep housed devices safe.

Passive cooling – Sufficient ventilation to accommodate any combination of Dynalite DIN rail dimming controllers at up to 70% of their rated loads.

Removable DIN rail plate – Allows you to mount devices outside of the enclosure, or run wiring behind the plate to maintain segregation.

Designed to hold up to four 12-unit DIN rail devices – or any combination of smaller devices, up to 24 units per rail.

Dimensions:

410 x 494 x 107 mm (16.14 x 19.45 x 4.21 in)

Ordering Code:

12NC - 913703339909



Dingus Connectors

Name	Description	Ordering Code
DINGUS-DACM-DUAL-RJ12	Suited to DyNet DACM, DUS360Cx plug – 2 x RJ12 sockets	12NC – 913703064309
DINGUS-DACM-DUAL-RJ45	Suited to DyNet DACM plug – 2 x RJ45 sockets	12NC – 913703334609
DINGUS-UI-RJ12-DUAL Classic 2 column	Suited to DyNet DLPA and DLPE 2 column; DPNA or DPNE 2, 3 and 4 column – 2 x RJ12 sockets	12NC – 913703069609
DINGUS-UI-RJ12-DUAL Classic 1 column	Suited to DR2PA and DR2PE 1 column – 2 RJ12 sockets	12NC – 913703069709
DINGUS-DMC-UL	Suited to DMC communication module – 2 x RJ45	12NC – 913703064209
DINGUS-DUS-RJ45-DUAL	Suited to DyNet DUS sensor range – 2 x RJ45 sockets	12NC – 913703064409
DINGUS-DUS-RJ12-DUAL	Suited to DyNet DUS sensor range – 2 x RJ12 sockets	12NC – 913703064309

Wired Systems



PDRAS Multizone Control System

Flexible all-in-one lighting control solution

The Philips Dynalite PDRAS brings energy management, occupancy detection, daylight harvesting, and code-compliance for multizone spaces, with simple, intuitive controls and optional ethernet connectivity for plug-and-play installation.

The PDRAS is preprogrammed and configured in our factory for easy installation and reliable operation. Simple plenum installation with pluggable user interfaces and sensors ensures industry-leading performance right out of the box.

Single-box solution – Assembled, programmed, and tested in the factory to provide complete out-of-the-box functionality.

Multizone support – Each control system can manage up to five separate zones in single- or dual-room applications.

Networked multifunction sensor – Reduce installation complexity and ceiling/plenum clutter with combined occupancy and light level (lux) detection.

Integrated daylight harvesting – Multifunction sensors micro-adjust lighting levels to meet energy management regulations without disrupting occupant comfort.

Optional networked PIR and ultrasonic sensors – Expand your system's occupancy detection footprint with up to three extra PIR sensors and/or one long-range ultrasonic sensor per room. Sensors communicate with each other so that their combined occupancy status determines the system response.

UL924 input – Integrates seamlessly with compatible emergency systems.

Stations with large buttons and simple labelling – Ensures straightforward operation for non-technical users.

Direct-drive relays – Isolate power to lighting groups and wall outlets to eliminate standby power consumption.



Software-selectable 1-10V / DALI control – Although factory-set for 1-10V, each control channel can be individually configured for DALI operation using Dynalite's System Builder commissioning software on a connected PC or laptop.

Ethernet connectivity* – Enables network access to the school LAN for centralized monitoring and management.

*Future provision for -E variants only, not enabled at release.

Ordering Codes:

Single-Room Controller	12NC
PDRAS120 (120 VAC)	913703348509
PDRAS277 (277/347 VAC)	913703348609
PDRAS120-E (120 VAC + Ethernet)	913703348709
PDRAS277-E (277/347 VAC + Ethernet)	913703348809

User Interfaces	12NC
DACM-PDRAS (Communication module)	913703349609
PA6BPA-WW-L-PDRAS	913703349709
PA4BPA-WW-L-PDRAS	913703349809
PA2BPA-WW-L-PDRAS	913703349909

Room 1 Sensors	12NC
DUS360CS-PDRAS-ML (Motion + lux sensor)	913703350009
DUS360CS-PDRAS-M (Motion only sensor)	913703350609
DUS804CS-UP-NA-PDRAS-M (Ultrasonic motion sensor)	913703350909

Spare RJ45 Connectors*	12NC
DINGUS-DUS-RJ45-DUAL (Dual RJ45 sensor connector - pack of 10)	913703064409
DINGUS-UI-RJ45-DUAL (Dual RJ45 DACM connector - pack of 10)	913703334609

*Each sensor and DACM is supplied with a dual RJ45 connector.

Dual-Room Controller	12NC
PD2DRAS120 (120 VAC)	913703349109
PD2DRAS277 (277/347 VAC)	913703349209
PD2DRAS120-E (120 VAC + Ethernet)	913703349309
PD2DRAS277-E (277/347 VAC + Ethernet)	913703349409

Room 2 Sensors	12NC
DUS360CS-PD2DRAS-ML (Motion + lux sensor)	913703350709
DUS360CS-PD2DRAS-M (Motion only sensor)	913703350809
DUS804CS-UP-NA-PD2DRAS-M (Ultrasonic motion sensor)	913703351009

PDUVCC UV-C control system

Control solution for UV-C surface disinfection systems

The Philips Dynalite PDUVCC control solution is a vital part of a properly designed and installed UV-C lighting system, that allows the system to be used and operated with greater safety than a system without an equivalent control solution in place.

This preconfigured solution incorporates switched outputs for driving Philips UV-C lamps and third-party audio alarms and warning lights. It also features an onboard settings interface, authorized key switch activation, lamp maintenance reporting, integrated Dynalite motion sensors, checkpoint buttons, and inputs for third-party emergency shutoff buttons and area safeguard door switches.

Single-box solution – Assembled, programmed, and tested in the factory to provide complete out-of-the-box functionality.

Integrated AntumbraDisplay – Allows authorized users to adjust UV-C disinfecting dosage and monitor lamp life management. Includes multi-language support.

Physical key switch protection – Helps to ensure that only authorized users can modify settings or activate the system.

External control inputs – Robust, reliable connection to door switches, emergency shutoff buttons, and vacancy confirmation checkpoints.

Motion sensor integration – Designed to work with Dynalite’s best-in-class network sensors to automatically shut down the UV lamps if motion is detected in the disinfection area.

System status indicators – Eight clearly labelled LEDs on the front of the enclosure show the device’s status at a glance.

Onboard event logging – All system events are logged and timestamped for reporting.

Ethernet connectivity – Enables secure network access to configuration and event logs via System Manager head-end software.

Dimensions:
500 x 400 x 200 mm (19.68 x 15.74 x 7.87 in)



Ordering Codes:

Product	12NC
PDUVCC-10 (UV-C Controller + 10 Sensors)	913703073709
PDUVCC-20 (UV-C Controller + 20 Sensors)	913703073809
PDUVCC-30 (UV-C Controller + 30 Sensors)	913703074309
DACM Language and Label Kits	12NC
German (label kit)	913703248209
Chinese (label kit)	913703248309
Italian (label kit + DACM)	913703248409
French (label kit + DACM)	913703248509
Spanish (label kit + DACM)	913703248609
Polish (label kit + DACM)	913703248709
Dutch (label kit + DACM)	913703248809
Japanese (label kit + DACM)	913703248909

PD-KoD DALI Demo Case

Discover the power of DyNet and DALI

This compact, portable device provides a simulated multi-universe DALI lighting control network for training and education purposes, incorporating both DALI and DyNet sensors and UIs.

Integrated DyNet and DALI terminals allow the connection of additional drivers, sensors, gateways, controllers, and UIs to simulate various control scenarios.

DDBC320-DALI controller – Delivers the combined power of three DALI universes and full DyNet functionality to simulate real-world lighting and control scenarios.

Realistic office floor plan – 40 embedded LEDs across two universes provide a combination of DALI 207, DALI 209 Tunable White, and DALI 209 RGBW control.

External DALI bus – Connect and control a full DALI universe, including drivers, sensors, and UIs

Antumbra & Revolution UIs – Simulate morning/afternoon/evening modes, control lighting scenes, and monitor temperature, humidity, and light levels in real time.

DyNet & DALI multifunction sensors – Demonstrate the power of automated systems to respond dynamically to occupancy and lighting changes.

Lamp override and UL924 toggles – Demonstrate the system response to lamp failures and emergency events.

24 hour simulation – use AntumbraDisplay to trigger morning/afternoon/evening modes

Dimensions:
(Closed - H x W x D) 161 x 430 x 380 mm (6.34 x 16.93 x 14.96 in)

Ordering Code:
Product 12NC
PD-KoD 913703335009



PD-KoD-TC DALI Mini Training Case

Discover the power of DyNet and DALI

This compact, portable device provides a simulated single-universe DALI lighting control network for training and education purposes, incorporating an AntumbraDisplay UI, DALI sensor, and dry contact user inputs.

Integrated DyNet and DALI terminals allow the connection of additional drivers, sensors, gateways, controllers, and UIs to simulate various control scenarios.

DDBC120-DALI controller – Delivers the combined power of DALI and DyNet functionality to simulate real-world lighting and control scenarios.

Realistic floor plan – 37 embedded LEDs provide a simulation of DALI dimming control.

External DALI terminal – Extend the inbuilt DALI universe with additional drivers, sensors, and UIs.

AntumbraDisplay UI – Simulate lighting scenes and monitor temperature and light levels in real time.

DALI multifunction sensor – Demonstrate the power of automated systems to respond dynamically to occupancy and lighting changes.

DPMI940-D dry contact interface – Two configurable momentary switches provide direct control via the DALI bus.

Dimensions:
(Closed - H x W x D) 90 x 210 x 130 mm (3.54 x 8.27 x 5.12 in)

Ordering Code:
Product 12NC
PD-KoD-TC 913703351509
Accessories 12NC
DTK622-USB (USB PC Node) 913703090209
DTK622-232 (Serial Port Node) 913703090109



Software and Apps



Philips Dynalite System Manager

System control, monitoring and management

Philips Dynalite System Manager is a multi-user control system management and monitoring software tool. It provides users with full visibility of the lighting and energy management system status and performance, while enabling simple local or global system adjustments.

Complete control – Initiate system changes, from a single lamp to the lighting state of an entire multi-story building, with a single mouse click.

Simple scheduling – Intuitive tools enable the user to schedule and manage events such as 'office space to day mode' or 'car parks to after-hours security mode' with ease.

Easy integration – Integration tools allow the user to manage more than just lighting. OPC DA/AE, OPC UA, HVAC, motorized window shades and other systems are accessible through System Manager.

Manage routine maintenance – Full support of maintenance functions means that routine tasks can be undertaken without the involvement of a system specialist. Faults are automatically flagged for attention, ensuring that the facility continues to function and operational downtime is minimized.

Strike the balance – Alternate energy management schemes can be initiated automatically or manually, as required. This allows facility managers to balance energy efficiency with the needs of the occupants and can be initiated on either a tenancy or building-wide basis.

Identify energy-saving initiatives based on current use – The energy dashboard presents live data as simple visual displays. It mines raw data for analysis, to both establish a benchmark for future improvements and pinpoint exactly where energy is being used.

Tailored control of individual light fittings – The optional desktop app resides in the task bar of a user's computer and allows task lighting to be tailored to the user's individual preferences. Linking PC usage to the lighting control system ensures lights are not left on unnecessarily.



Ordering Code:
12NC – SW913703089909

OPC UA License

System Manager OPC-UA	100 point license	SW913703370109
System Manager OPC-UA	1k point license	SW913703370209
System Manager OPC-UA	5k Point license	SW913703370309
System Manager OPC-UA	10k Point license	SW913703370409

Philips Dynalite System Builder

Fast and efficient lighting control system set-up

Designed with the system installer and integrator in mind, System Builder is a comprehensive platform from Philips Dynalite. This user-friendly and intuitive application sets a new benchmark for efficient lighting control system set-up.

New and improved set-up templates – Provides a simple and intuitive interface for access to advanced system functionality, allowing flexibility to modify, customize or create specific tasks if required.

Faster commissioning times – Includes a series of common device settings based on typical lighting control scenarios. Tailor to your project, save and replicate across other sites as required.

Virtual panel – Control any area of the system directly, run sequences and test final operations.


Complex functionality made simple – Manage logical grouping of lamps and other system hardware elements using simple graphical representations.

Maintenance made easy – Print out project floor plans with fixture details, including DALI addresses, to facilitate maintenance planning.

Live data details – The status of each lamp is visually represented using icons, which change color to reflect current lighting levels.

Monitor the whole system – Inbuilt network monitor details and logs all Philips Dynalite network traffic, as well as DALI network traffic.

Ordering Code:
Philips Dynalite System Builder is available for authorized users on the technical support website www.dynalite.com

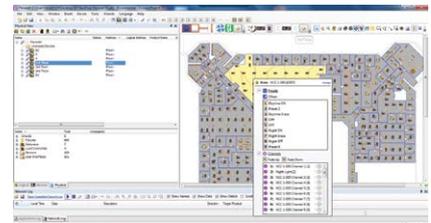

Philips Dynalite Control App

Intuitive mobile interface

The new Philips Dynalite control app is available for iOS. It provides intelligent mobile control of the Philips Dynalite system in both residential and commercial applications. Wrapped in a modern and intuitive user interface, this app allows you to manage scenes, control individual channels and apply schedules.

Plug-and-play – Connect the mobile app to the Philips Dynalite system and it's ready to use.


Scene management – Recall and edit pre-defined lighting scenes and control individual lighting channels.

Scene scheduling – Trigger lighting scenes based on a schedule.

Simple connection – Connect to the PDEG - Philips Dynalite Ethernet Gateway, through your local Wi-Fi network.

Available for iOS – Works on iPhone, iPad and iPod Touch

Ordering Code:
Search the iOS App Store for 'Philips Dynalite'.

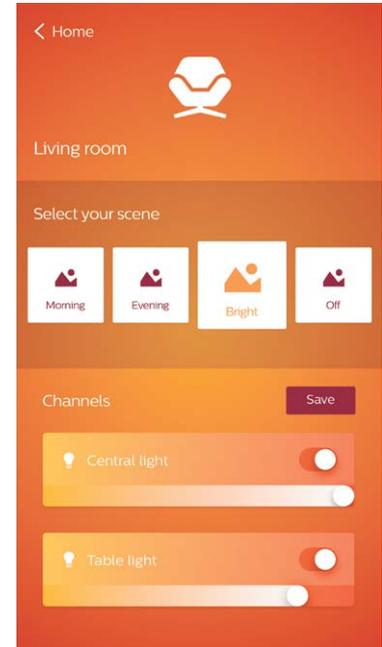

Philips Dynalite EnvisionTouch

Intuitive and effortless control

The Philips Dynalite Self-configuring Mobile App provides intelligent system control via an iOS or Android hand-held device. Suited to both residential and commercial control applications, multiple integrated systems can be easily controlled with single preset scenarios such as 'Welcome Home' or 'After Hours'.

Self-configuring application – Standardized templates and functionality reduce commissioning and installation time.

Effortless control – Users can view current system status and make adjustments to lighting, HVAC, blinds and other equipment connected to the Philips Dynalite control network.


Control individual lighting channels – Adjust standard light sources via sliders, with an option to control tunable white fixtures and RGB color settings.

Single-click control – Recall predefined user preferences for lighting, blinds, heating and entertainment systems.

Available for iOS and Android – Works on iPhone, iPad, iPad Mini, iPod Touch and a range of Android phones and tablet devices.

Simple Ethernet connection – Requires a Philips Dynalite Ethernet Gateway and a WiFi router to connect to a Philips Dynalite System.

Ordering Code:
Search the iOS App Store or Google Play Store for 'Philips Dynalite'.

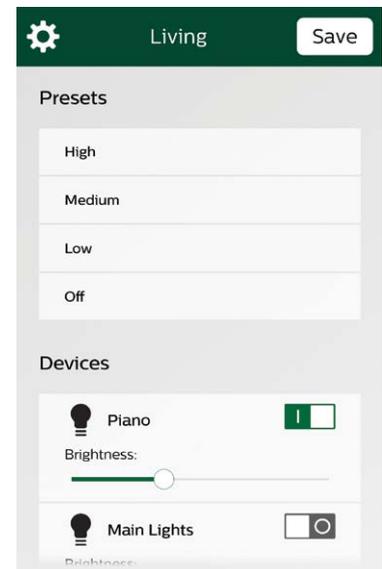

Philips Dynalite DynamicTouch

Fully tailored to customer needs

The Philips Dynalite Customizable Mobile App provides intelligent system control, via an iOS hand-held device. Suited to both residential and commercial control applications, multiple integrated systems can be easily controlled with single preset scenarios. It is fully customizable, providing the user with the ability to fine-tune both the system and the appearance of the interface itself.

Fully customizable – The page layout and graphical design of this app can be customized by the installer to meet the exact requirements of the end-user. It is the ideal choice in applications such as boardrooms, where high levels of control are required for multiple systems through a single app.

Effortless control – Users can view current system status and make adjustments to lighting, HVAC, blinds and other equipment connected to the Philips Dynalite control network.


Control individual lighting channels – Adjust standard light sources via sliders, with an option to control tunable white fixtures and RGB color settings.

Single-click control – Recall predefined user preferences for lighting, blinds, heating and entertainment systems.




Available for Apple iOS devices only – Works on iPhone, iPad, iPad Mini and iPod Touch.

Simple Ethernet connection – Requires a PDEG and a WiFi router to connect to a Philips Dynalite system.

Ordering Code:
Search the iOS App Store for 'Philips Dynalite'.

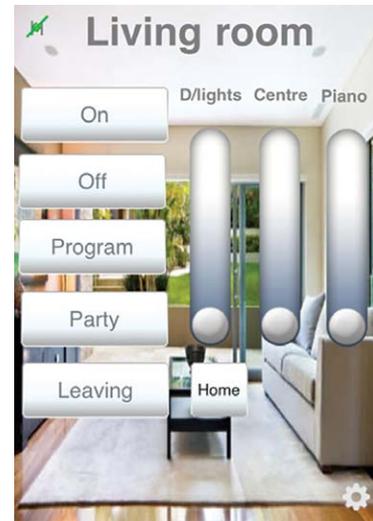

Further Reading

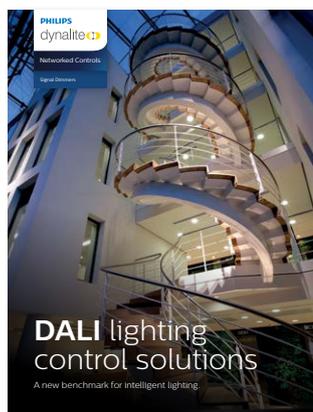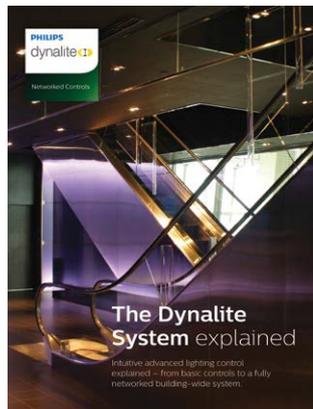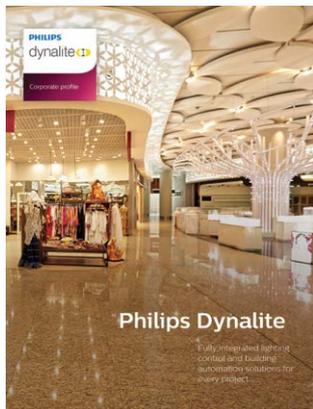

Visit www.dynalite.com to download your copy of our brochures or contact your local Signify representative.



← ♿

NESPRESSO

NESPRESSO

ZARA

ZARA

Spädbarn
kåskum
på köp

Ja värde
på varor

THE
GALLERY

POUS



Westfield Mall of Scandinavia
Stockholm, Sweden



www.dynalite.com

© 2023 Signify Holding.

All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Cover Image: Taby Centrum
CE - CE: <https://www.ce-ce.se/>
Control dept: <https://controldept.com/>

PDL 566 0123 AZZAUS