



DDNG485

RS-485/DMX512 Gateway

Flexible network communications gateway


The Philips Dynalite DDNG485 is a flexible network communications bridge designed for RS-485 networks. The two optically isolated RS-485 ports enable the DDNG485 to implement a trunk and spur topology on large project sites, with the bridge providing a high-speed backbone optically coupled to many lower-speed spurs.

DDNG485

Flexible network communications gateway

- **Route DyNet to third-party systems** – Such as audio-visual, Modbus meters, and building automation systems, providing an integrated approach to total building control and energy management.
- **DMX512 mode** – Transmit or receive up to 512 channels of DMX with automatic DyNet conversion and task triggering. Provides temporary control of house lights from the DMX console in an auditorium scenario.
- **Electrical fault isolation** – Faults can be isolated to individual network spurs.
- **Internal controls** – Programmable logic controller capable of comprehensive conditional and sequential logic and arithmetic function processing, packet filtering, and DyNet to DyNet 2 translation.
- **Flexible mounting solution** – DIN rail mountable, designed to be installed into a distribution board or other electrical enclosure.

Dimensions

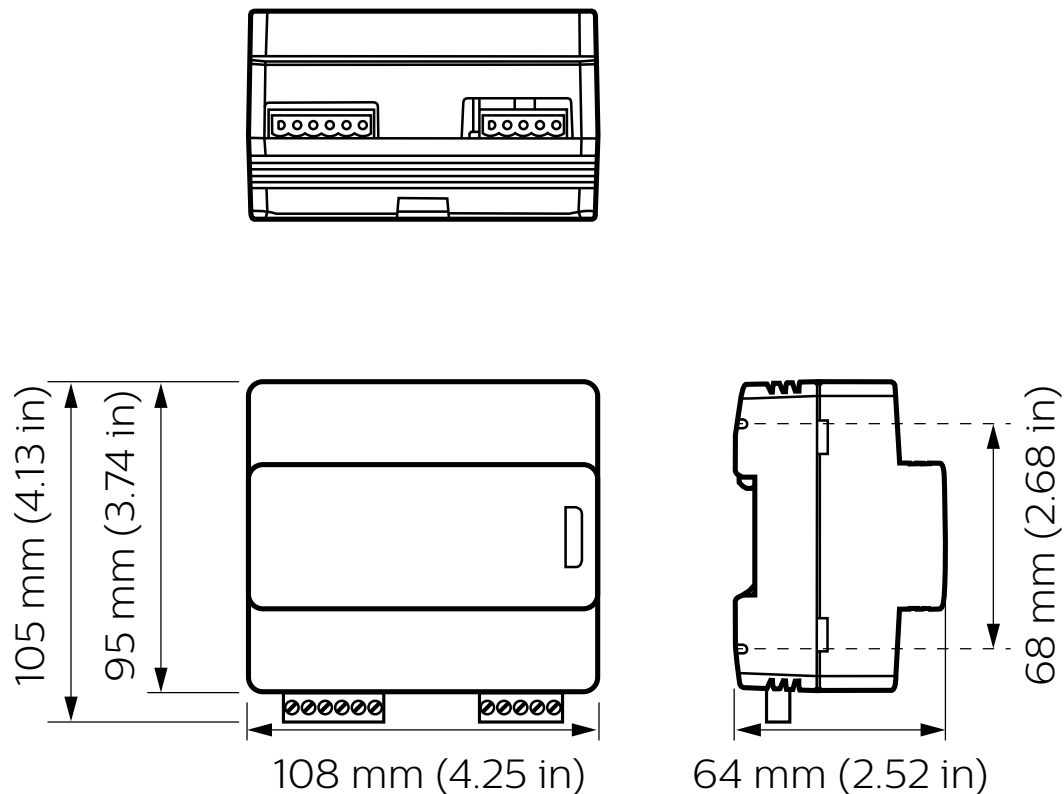

Specifications

Due to continuous improvements and innovations, specifications may change without notice.



DDNG485
RS-485/DMX512 Gateway

Electrical

Supply Voltage (DyNet Port 1)	12-24 VDC SELV / Class 2 (UL)
Supply Current	70 mA + (1.6 x DyNet Port 2 load current) @ 12 VDC 60 mA + (0.7 x DyNet Port 2 load current) @ 24 VDC
Serial Port Isolation	Optical (3.75 kV RMS)
Output Voltage (DyNet Port 2)	12 VDC
Output Current	200 mA (max) SELV / Class 2 (UL)
IEC Overvoltage Category	III

Control

Communication Ports	Port 1: RS-485 (600- 115,200 bps) Port 2: RS-485 (600- 115,200 bps)
Supported Protocols	Port 1: DyNet Port 2: DyNet, DMX, Modbus
DMX Tx/Rx Channels	512
Dry Contact Inputs	1 x AUX SELV / Class 2 (UL)
User Controls	1 x service switch
Indicators	1 x service LED
Diagnostic Functions	Device online/offline status

Physical

Dimensions (H x W x D)	95 x 108 x 64 mm (3.74 x 4.25 x 2.52 in)
Packed Weight	0.22 kg (0.49 lb)
Construction	G3.1-style plastic DIN rail enclosure (6 unit)
Communication Ports	1 x 6-way pluggable screw terminal 1 x 5-way pluggable screw terminal
Communication Terminal Conductor Size	0.3 - 2.5 mm ² (22 - 12 AWG)

Environment*



Operating Temperature	0° to 50°C ambient (32° to 122°F)
Storage/Transport Temperature	-25° to 70°C ambient (-13° to 158°F)
Relative Humidity	0 to 90% non-condensing
IEC Pollution Degree	II

Compliance


Certification	CE, RCM, UL/cUL, FCC, ICES, UKCA, RoHS
---------------	--

- * Install in a dry indoor well-ventilated location only
Minimum 45 mm top and bottom clearance

Electrical

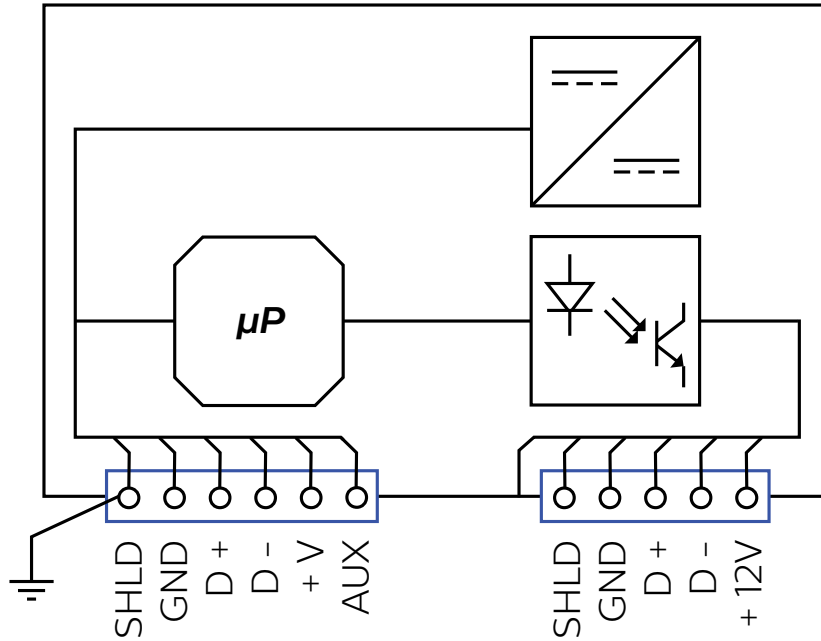

70 mA +(1.6 x DyNet Port 2 load current) @ 12 V



12 V 200 mA

60 mA +(0.7 x DyNet Port 2 load current) @ 24 V

SELV/Class 2 (UL)

Ordering Code

Product

DDNG485

Philips 12NC

913703366709

© 2024 Signify Holding.

All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.



www.dynalite.com

Revision 08 – 2024-08-07